



Lantech.com

Stretch Wrapping. Case Handling. Shrink Packaging. Palletizing. Conveying.

Lan-ringer®

Century Series
LR-4000 / LR-6000 / LR-7500 / LR-9000

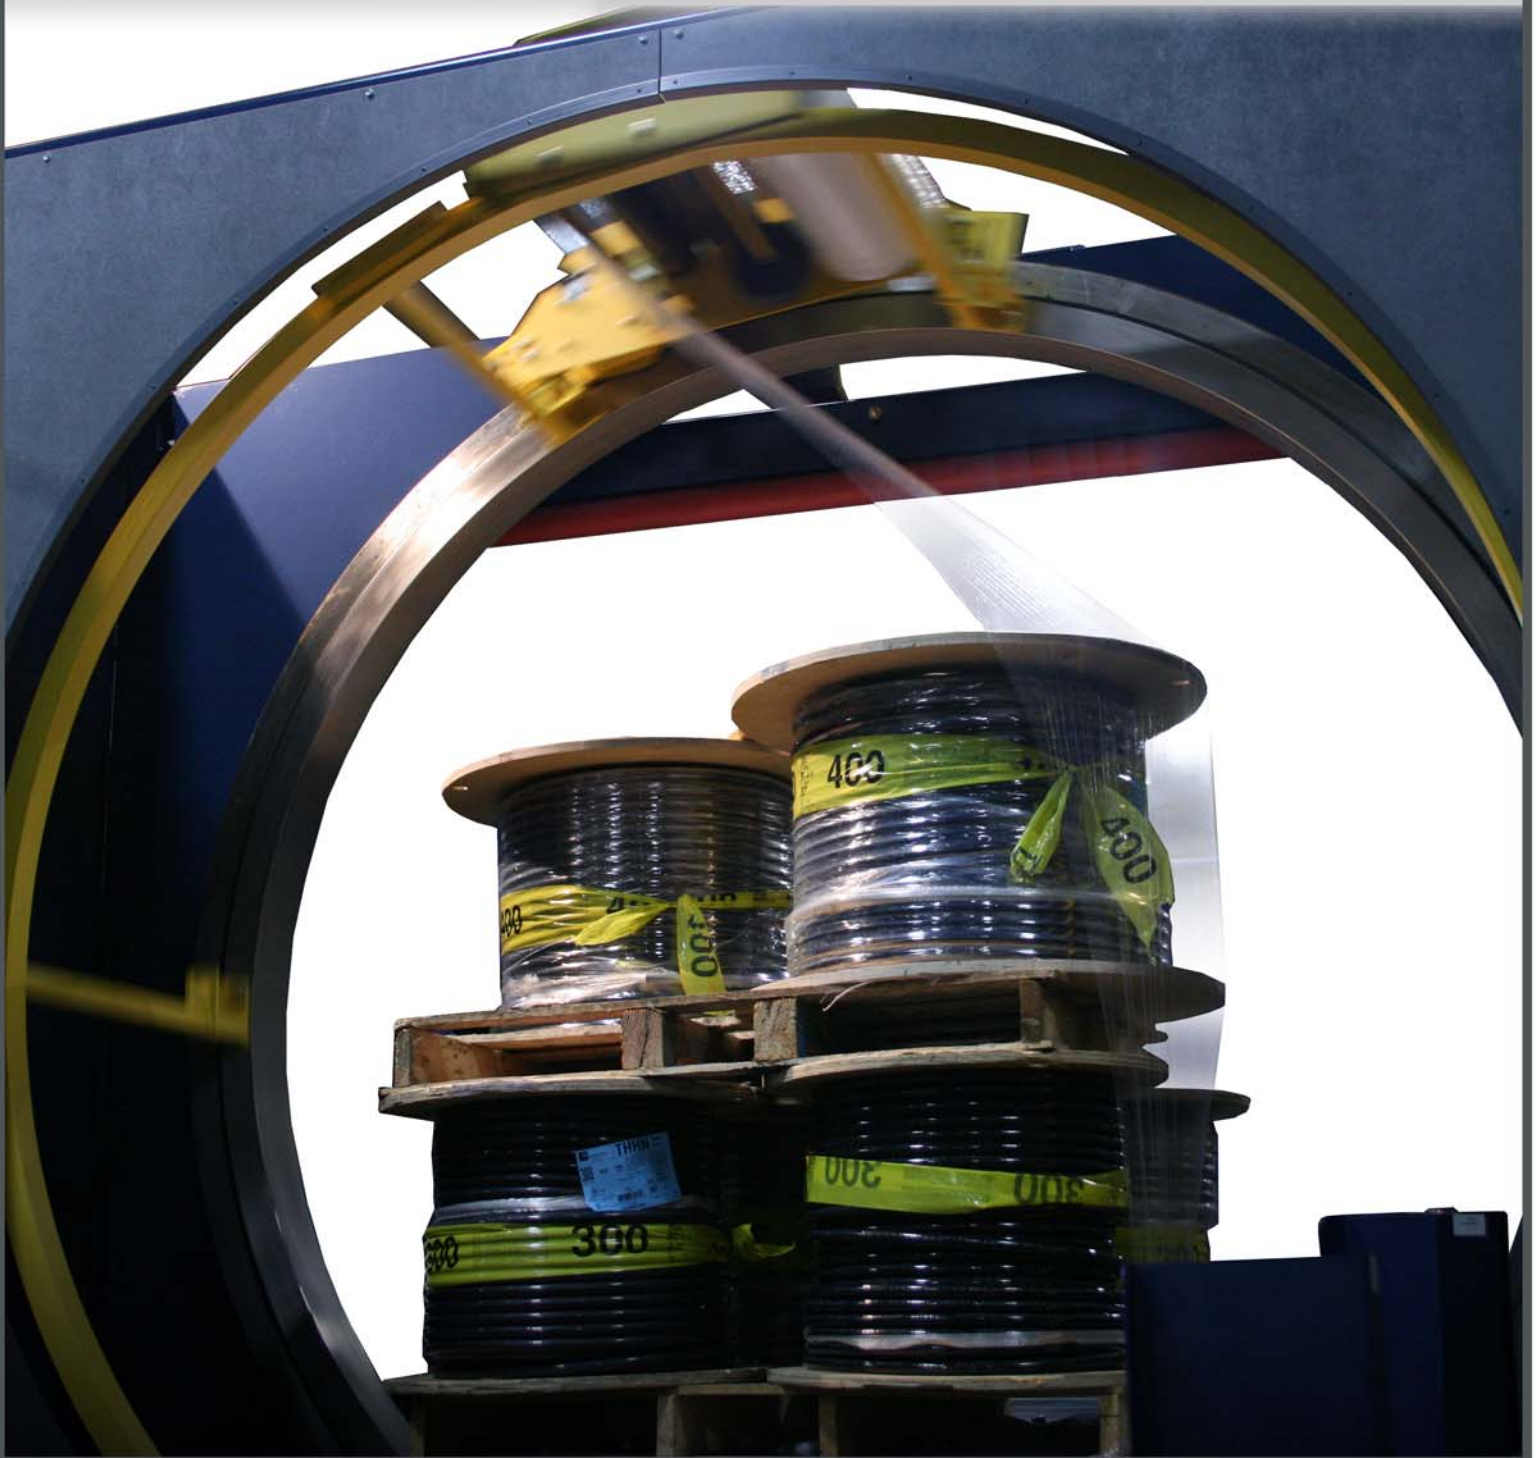

- Over 30 years of application knowledge
- Service and Engineering working together
- 5" thick steel precision bearing
- Exclusive dual support roll carriage
- Lenze 5HP Drive System "All-in-One Unit" (motor, brake, reducer)
- Allen Bradley touchscreen Panel View 600 Plus
- Robust power-thru® conveyor system
- Lan-Logix™ state-of-the-art control system



Custom built for heavy loads that require high wrap force.



Lan-ringer Specifications

Film Delivery System

Power Roller-Stretch® System 150% Standard, 100-250% Available Adjustable
 Wrapping Force
 Film Capacity 10" Roll Diameter, 20"-30" Film Width
 Film Break Detection Standard

Electrical Requirements

Machine Voltage 460V, 30 Amp

Air Requirements

Clean, Dry Air 3-5 CFM, 80 PSI

Service Support

24 hrs/7 days a week

	RPM	Max Load Size Diagonal
LR-4000	50	32"
LR-6000	40	52"
LR-7500	30	67"
LR-9000	25	82"
Min Load Length (with power-thru conveyor)		
	24" (20" Film)	36" (30" Film)
Min Load Length (without power-thru conveyor)		
	60" (20" Film)	72" (30" Film)